

PYRAMID MASONRY and CHIMNEY LINING COMPANY

The chimney restoration company

Toll Free: 800-232-0405

Fax: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave Churchville VA 24421

FOR YOUR SAFETY AND COMFORT:




Why Reline a Chimney Flue-Especially When it Looks Fine?

The flue liner is often the most neglected part of your chimney. Traditional masonry flue tiles cannot handle the acidic moisture created by your furnace, boiler, or hot water tank. This acid attacks and breaks down flue tiles and the mortar in between them. This damage can prevent harmful exhaust gases from leaving your chimney and home.



Safety Tip: The National Fire Protection Association (NFP211) says, "Chimneys, fireplaces, and vents shall be inspected at least once a year for soundness, freedom from deposits, and correct clearances. Cleaning, maintenance, and repairs shall be done if necessary."

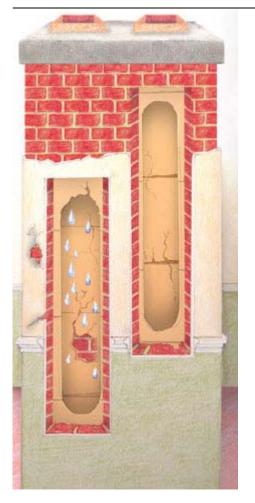

The Interior is Often Dramatically Different and in Need of Attention:

Oil Heating Appliances:

When mixed with acidic condensation, soot buildup from your oil furnace and hot water tank on the walls of the chimney create sulfuric acid, which will deteriorate the clay flue tiles.

Gas Heating Appliances:

Greater amounts of condensation produced by the high efficiency of newer heating appliances., combined with many installations in old oil furnace flues, speeds up deterioration. 2 cubic feet of water vapor is produced with each 1 cubic foot of gas burned.

Fireplaces and Wood Stoves:

Creosote formation is the unavoidable by product from burning wood. Most wood stoves are manufactured to vent into an area much smaller than that of your chimney flue. The oversized flue causes a reduced rate of smoke exiting the flue, leaving it to linger and deposit creosote on your tiles. The danger with creosote is the 450° F ignition point—consider the average wood stove produces gases leaving your fireplace at 300° F to 900° F- causing a chimney fire of up to 2100° F. If your chimney flue has no tiles, it is likely that these gases and creosote are leaking directly into your home, leading to a possible fire or creating carbon monoxide poisoning.

Real Statistics:

In 2001, an estimated 18,300 reported home structure fires involving chimney supporting solid-fueled equipment resulted in \$48 million in direct property damage. (NFPA)



PYRAMID MASONRY and CHIMNEY LINING COMPANY

The chimney restoration company

Toll Free: 800-232-0405

Local: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave Churchville VA 24421

Don't Let Damage & Deterioration Lead to Hazardous Conditions

Chimney Defects can result in injury or death from fires and carbon monoxide poisoning.

Having a fire start in your chimney and rising to 2100 is extremely damaging and dangerous to your family. It doesn't take a lot to start a house fire once your chimney has reached the threatening point of catching fire. One spark through a crack or an ember igniting the creosote and climbing your chimney seeking an escape route is often enough.

No fireplace? Your furnace flue is responsible for venting deadly gases which can escape into your house home through the tiniest of cracks.

Why wait to prevent something so dangerous to your family?

The M-Flex liner is air and water tight, locking in moisture and hazardous gases—exhausting them safely out of your home.



In 2001, 650 people died of unintentional non-fire exposure to gases... and there have been more than 30,000 hospital emergency room injuries per year. (NFPA)



Your Perfect Solution:



M-Flex CB 316L/Ti Titanium

The Professionals Choice for Superior Venting Efficiency The M-Flex CB Stainless Steel Flexible Chimney Liner is designed to reline existing chimneys or to be used as a liner in new construction.

The M-Flex Liner alloys are designed specifically to resist acids and extreme temperature stress during hot and cold cycles.

The M-Flex Liner is manufactured with a 7-ply, crimped seam that leaves the product with an extremely strong finish and unequaled flexibility. Using the highest quality Prime Mill Certified 316 L/Ti grade alloy steel available today, the M-Flex Liner has an extremely high acid fighting capacity, with excellent heat resistance. Also, since no heat is used during manufacturing, such as welded seam products, there will be no loss in corrosion resistance that may be caused by direct heating of the stainless steel.



PYRAMID MASONRY and CHIMNEY LINING COMPANY

The chimney restoration company


Toll Free: 800-232-0405


Local: 540-337-8065 Fax: 540-337-8065 3836 churchville Ave Churchville: VA 24421

ONE SOLUTION


for every application


By having your chimney relined with the M-Flex 316 L/Ti Stainless Steel Liner, you will not only increase the efficiency of your fuel burning appliance, but more importantly, you can rest assured that your chimney is safe for use.











INSULATION:

Having your liner insulated with either Premier Mix- a poured insulation mixture, or Premier Wrap- a ceramic wool blanket helps create a steady draft and allows for zero clearance installation.





Premier-Mix













Premier- Wrap

The M-FlexTM Warranty

Place Stamp Here

NOTICE:

Register your warranty by mailing this card as soon as your liner is installed!

The M-FlexTM Warranty

C/O National Chimney Supply Corporate Headquarters 3 Green Tree Drive South Burlington, VT 05403

The M-FlexTM Warranty



THE M-FLEX WARRANTY

National Chimney Supply, Inc. (N.C.S.), guarantees that the M-Flex chimney liners and components supplied by it are free from defects in material and Manufacturer's workmanship, and from perforation caused by chimney fire or overfiring caused by you the purchaser, and corrosion.

WARRANTY TIME PERIODS and CONDITIONS

Lifetime Warranty for wood, wood pellet, gas and oil burning installations. When used to vent UL listed residential wood burning stoves and fireplaces, wood pellet stoves, Category 1 residential gas, oil burning heating systems, Category 1 gas, and oil burning water heaters, gas fireplaces, or gas logs are guaranteed for the lifetime of the original M-Flex purchaser as long as said purchaser owns the home in which the M-Flex was originally installed. If the home is sold, this warranty shall transfer to the buyer. For M-Flex Lite, warranty will transfer for a period of 10 years from date of M-Flex installation.

The M-Flex warranty is subject to the following: (1) installation of the liner and components in accordance with manufacturer's written installation instructions; (2) use of the liner and components only for the lining and relining of chimneys used to vent residential appliances for which the liner was intended; and (3) annual inspection, maintenance, and cleaning of liner, beginning one year after the date of installation and continuing at intervals of no more than twelve months from the date of installation, by a nationally certified chimney sweep, M-Flex installer, or other qualified chimney professional, who must fill out the appropriate section of the M-Flex Maintenance Record.

The M-Flex warranty is further subject to compliance with the following requirements throughout the warranty period: (1) the chimney must have a chimney cap; (2) Corrosive chemical chimney cleaners must not be used; (3) Plastic bristle flue cleaning brushes are recommended; (4) Driftwood, wood or wood pellets containing salt, preservative treated lumber, plastic, or household trash must not be burned in the appliance, or fireplace connected to the liner. In the case of a chimney fire, the liner must be inspected by a nationally certified chimney sweep, M-Flex installer, or other qualified chimney professional before reuse.

CLAIMS/LIMITATIONS OF LIABILITY

Should you need to make a claim under the conditions of this warranty, contact your M-Flex installer to provide N.C.S. with information about the claim. Should N.C.S. require factory inspection of the defective parts N.C.S. will pay for the shipping of the material, to be inspected, to our factory for inspection. If the material is deemed defective by N.C.S., replacement of the defective material with new material, and shipping of the replacement material will be paid for by N.C.S., and will be considered your exclusive remedy under this warranty. Neither N.C.S. nor the installer of the M-Flex Liner shall be liable for any costs for removal or reinstallation of the liner or any liability for special, consequential, or incidental damages in any way related to, or arising out of, defects in, or damage to, the M-Flex Liner. This warranty gives you specific legal rights, and you may have other rights which vary from state to state concerning exclusion or limitation of incidental or consequential damages.

The M-FlexTM Warranty Registration Card



DETACH THIS CARD AND MAIL BACK TO NCS, INC.	Customer Name	Number of chimneys lined with M-Flex:		
	Address	Approx. height (in ft.) of each chimney:		
	City	Number of M-Flex liners:		
	StateZip	(Note each chimney may have one of more liners)		
	Phone	Type of M-Flex Liners: 316 TI316LAL294C		
	M-Flex Installer Name	Heavywall Type of appliances vented with M-Flex liners:		
	Company	(Please indicate the number of each appliance type)		
	Address	Wood Stove Fireplace Insert		
	StateZip	Fireplace Gas or Oil Space Heater		
	Phone	Gas Log Pellet Stove		
	Date of Installation	Water Heater Gas central heating system		
		Oil central heating		
	If you need information to fill out this form, please contact	Other (please specify)		
	your M-Flex installer, call or write:	Type of insulation used around liners:		
	National Chimney Supply Corporate Headquarters	Premier Mix Premier Wrap		
	3 Green Tree Drive	Other (please specify)		
	South Burlington, VT 05403	None		
	802-658-8898	Chase Cover Size:		
		Premiere Top Size:		
	IMPORTANT: Diagra complete a	nd mail this cord as soon as your lines is installed		

PRTANT: Please complete and mail this card as soon as your liner is installed. This card will serve as proof of your purchase, should you misplace your original invoice.

M-FlexTM Maintenance Record



After each annual inspection, maintenance and cleaning, have your chimney sweep or M-Flex installer fill out and date the appropriate section of this card.

YEAR 1 - Maintenance

Work Done

N	ame
D	ate of installation
M	-FLEX installer
	Phone
	Company
	Address
	City
	StateZip
Fo se in	or each subsequent year, keep parate records of the required spection, maintenance and eaning.
	caning.
	ational Chimney Supply

NOTICE:

National Chimney Supply Corporate Headquarters 3 Green Tree Drive South Burlington, VT 05403 802-658-8898

Sweep/Installer	
Address_	
Work Done	
Date	
YEAR 2 - Maintenance	
Sweep/Installer	
Address	
Work Done	
Date	
YEAR 3 - Maintenance	
Sweep/Installer	
Address	
Work Done	
Date	
YEAR 4 - Maintenance	
Sweep/Installer	
Address	
Work Done	
Date	
YEAR 5 - Maintenance	
Sweep/Installer	
h 12	

YEAR 6 -	Maintenance
Sweep/Inst	aller
Address	%
Date	
YEAR 7 -	Maintenance
Sweep/Inst	aller
Address	
	<u>-</u>
Date	
YEAR 8 -	Maintenance
Sweep/Inst	aller
Date	
	Maintenance
Sweep/Inst	iller
Work Done	<u></u>
Date	
YEAR 10	Maintenance
Sweep/Inst	ıller
Data	